


**UTP690BV  
RG6 Shield 90%  
Black Jacket**

**High Quality cable outer jacket with green line**

- Inner conductor :** 1.02 mm. CCS 21%
- Dielectric Core :** 4.57 mm.
- Foil :** 18 mm. ALU/PET BOUNDED FOIL
- Braid :** 6\*16/0.16 mm.
- Jacket :** 6.80 mm. (black)
- Packing :** 305 m./PLYWOOD DRUM

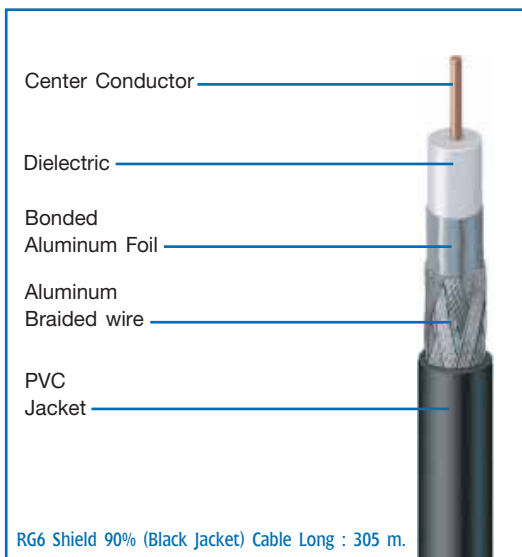

**ATTENUATOR (68 Degrees F (20 Degree C))**

Frequency MHz	dB/100 meters
5 MHz	1.80 dB
50 MHz	4.70 dB
55 MHz	4.95 dB
200 MHz	9.50 dB
211 MHz	9.70 dB
300 MHz	11.00 dB
400 MHz	12.80 dB
450 MHz	13.40 dB
500 MHz	14.62 dB
550 MHz	14.80 dB
600 MHz	15.65 dB
750 MHz	17.20 dB
800 MHz	18.90 dB
860 MHz	20.30 dB
1000 MHz	21.80 dB
1350 MHz	25.40 dB
1750 MHz	29.00 dB
2150 MHz	32.80 dB

